
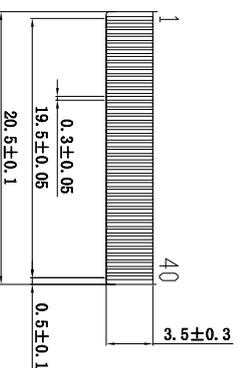


LCM PIN Definition

1	LEDK	21	B0
2	LEDA	22	B1
3	GND	23	B2
4	VDD	24	B3
5	R0	25	B4
6	R1	26	B5
7	R2	27	B6
8	R3	28	B7
9	R4	29	GND
10	R5	30	CLK
11	R6	31	DISP
12	R7	32	HSMC
13	G0	33	VSMC
14	G1	34	DE
15	G2	35	NC
16	G3	36	GND
17	G4	37	XR
18	G5	38	YD
19	G6	39	XL
20	G7	40	YU

LCD Type	7.0" TFT, Transmissive, Normally white, TN
Resolution	800(RGB)*480
View Direction	12 O'clock
Driver IC	HC9716BD/BD3AEK73002ACGB
Color Depth	16.7M
Interface Types	TTL(RGB-24bit)
Operating voltage	3.3V
TP/Lens	With RTP
Backlight LEDs	36 LEDs, 240mA, 9.6V
Surface luminance	720 min 800 typ(cd/m ²)
Operating temperature	-20 °C ~ 70 °C
Storage Temperature	-30 °C ~ 80 °C
Storage Humidity	60% ~ 90% max

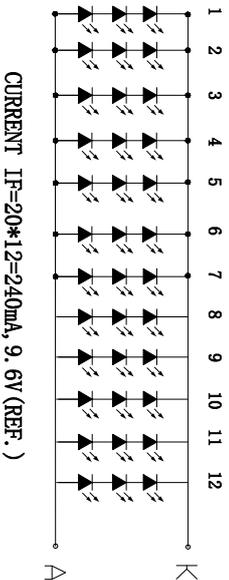

Need to pay attention to

the key size with *

版本 (Version)	变更记录 (Change History)	日期 (Date)	视角 (View):	比例 (Proportion):	设计 (DESIGN)	审核 (AUDITING)	批准 (APPROVED)
V1	INITIAL RELEASE	Jul-10-2018	单位 (Unit): M M	Unnoted tolerance: ±0.2			
V2			产品型号 (Product Type):	TST070M11WV-10P			
V3			版本 (Version):	V1			



东莞市一众显示科技有限公司
DONG GUAN TEAM SOURCE DISPLAY TECH. CO, LTD.