



1: LEDA
2: LEDK1
3: LEDK2
4: VCI
5: IOVCC
6: RESET
7: TE
8: PWM
9: GND
10: D0_P
11: D0_N
12: GND
13: D1_P
14: D1_N
15: GND
16: CLK_P
17: CLK_N
18: GND
19: D2_P
20: D2_N
21: GND
22: D3_P
23: D3_N
24: GND
25: TP_INF
26: TP_SDA
27: TP_SCL
28: TP_IOVCC
29: TP_VCI
30: GND

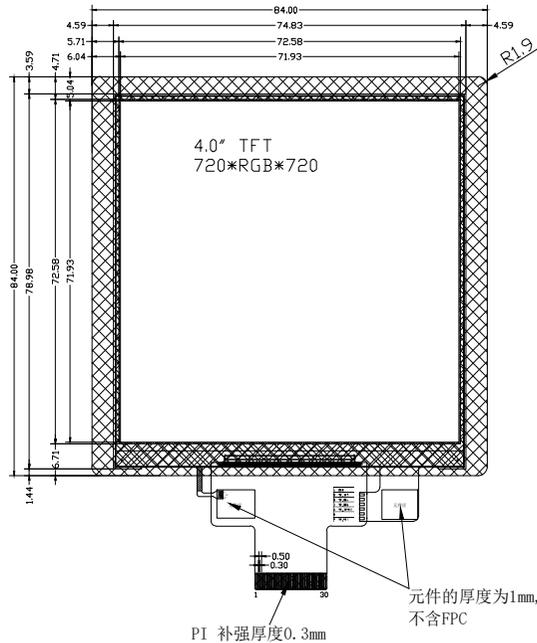

LCD Type	4.0" TFT, Transmissive, Normally black, ips
Resolution	720(RGB)*720
View Direction	All O'CLOCK
Driver IC	YY1821
Color Depth	16.7M
Interface Types	MIPI
Operating voltage	3.3V
TP/Lens	With CTP
Backlight LEDs	8 LEDs, 40mA, 12.4V
Surface luminance	330 cd/m2
Operating temperature	-20 °C ~ 70 °C
Storage Temperature	-30 °C ~ 80 °C
Storage Humidity	60% ~ 90% max

" " Need to pay attention to		the key size with *		<b>东莞市一众显示科技有限公司</b> DONG GUAN TEAM SOURCE DISPLAY TECH. CO., LTD.				
版本 (Version)	变更记录 (Change History)	日期 (Date)	视角 (View):	比例 (Proportion):	1 : 1	设计 (DESIGN)	审核 (AUDITING)	批准 (APPROVED)
V1			单位 (Unit):	MM	页面 (Page):	1 / 1		
V2			产品型号 (Product Type):	TST040HDBY-06		Aron		
			图纸版本 (Version):	V1		2018.10.26		