
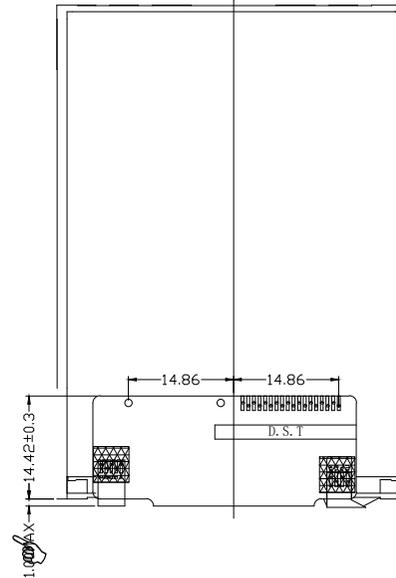



不包含双面胶厚度  
1.00

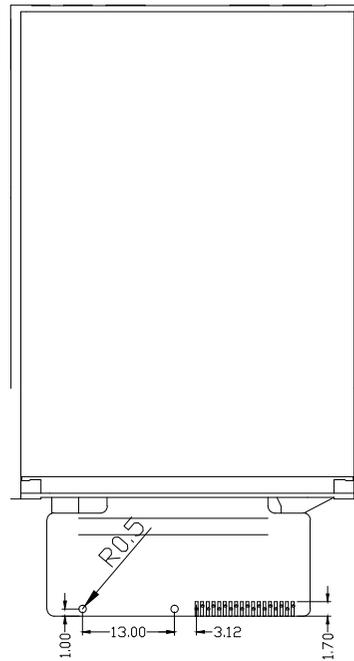

屏使用3线单通道

PIN	Symbol
1	GND
2	LED-K
3	LED-A
4	GND
5	RESET
6	NC
7	SDA
8	SCK
9	VCC-2.8V
10	IOVCC-1.8V
11	CS
12	GND
13	YD
14	XL
15	YU
16	XR
17	GND
18	GND

LCD Type	2.8" TFT, Transmissive, Normally white, TN
Resolution	240(RGB)*320
View Direction	6 O'CLOCK
Driver IC	ST7789V
Color Depth	262K
Interface Types	SPI 3LINE
Operating voltage	2.8V
TP/Lens	With RTP
Backlight LEDs	4 LEDs, 60mA, 3.2V
Surface luminance	250 cd/m <sup>2</sup>
Operating temperature	-20 °C ~ 70 °C
Storage Temperature	-30 °C ~ 80 °C
Storage Humidity	60°C 90% max



BLU circuit, 15mA\*4 at 3.2Vdc

" " Need to pay attention to		the key size with *		东莞市一众显示科技有限公司 DONG GUAN TEAM SOURCE DISPLAY TECH. CO, LTD.			设计 (DESIGN)	审核 (AUDITING)	批准 (APPROVED)
版本 (Version)	变更记录 (Change History)	日期 (Date)	视角 (View):	比例 (Proportion):	1 : 1	Jacky	Aron	2018.6.4	2018.6.4
V1			单位 (Unit):	M M	页面 (Page):				
V2			产品型号 (Product Type):	TST028QVVS-09P					
			图纸版本 (Version):	V1					