
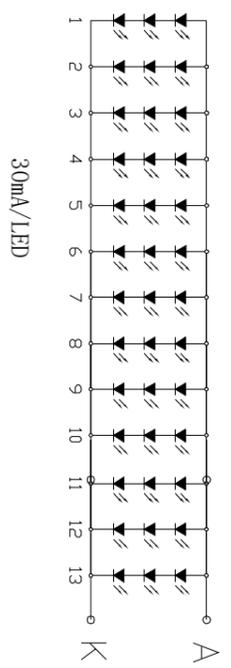


PIN: NAME	
1	VCOM
2	VDD
3	VDD
4	NC
5	RRESET
6	U/D
7	L/R
8	STBYB
9	GND
10	RXCLKIN-
11	RXCLKIN+
12	GND
13	RXIN0-
14	RXIN10+
15	GND
16	RXIN-
17	RXIN+
18	GND
19	RXIN2-
20	RXIN2+
21	GND
22	RXIN3-
23	RXIN3+
24	GND
25	SELB
26	GND
27	AVDD
28	GND
29	VGH
30	NC
31	NC
32	VGL
33	GND
34	NC
35	LEDK
36	LEDK
37	NC
38	NC
39	LEDA
40	LEDA

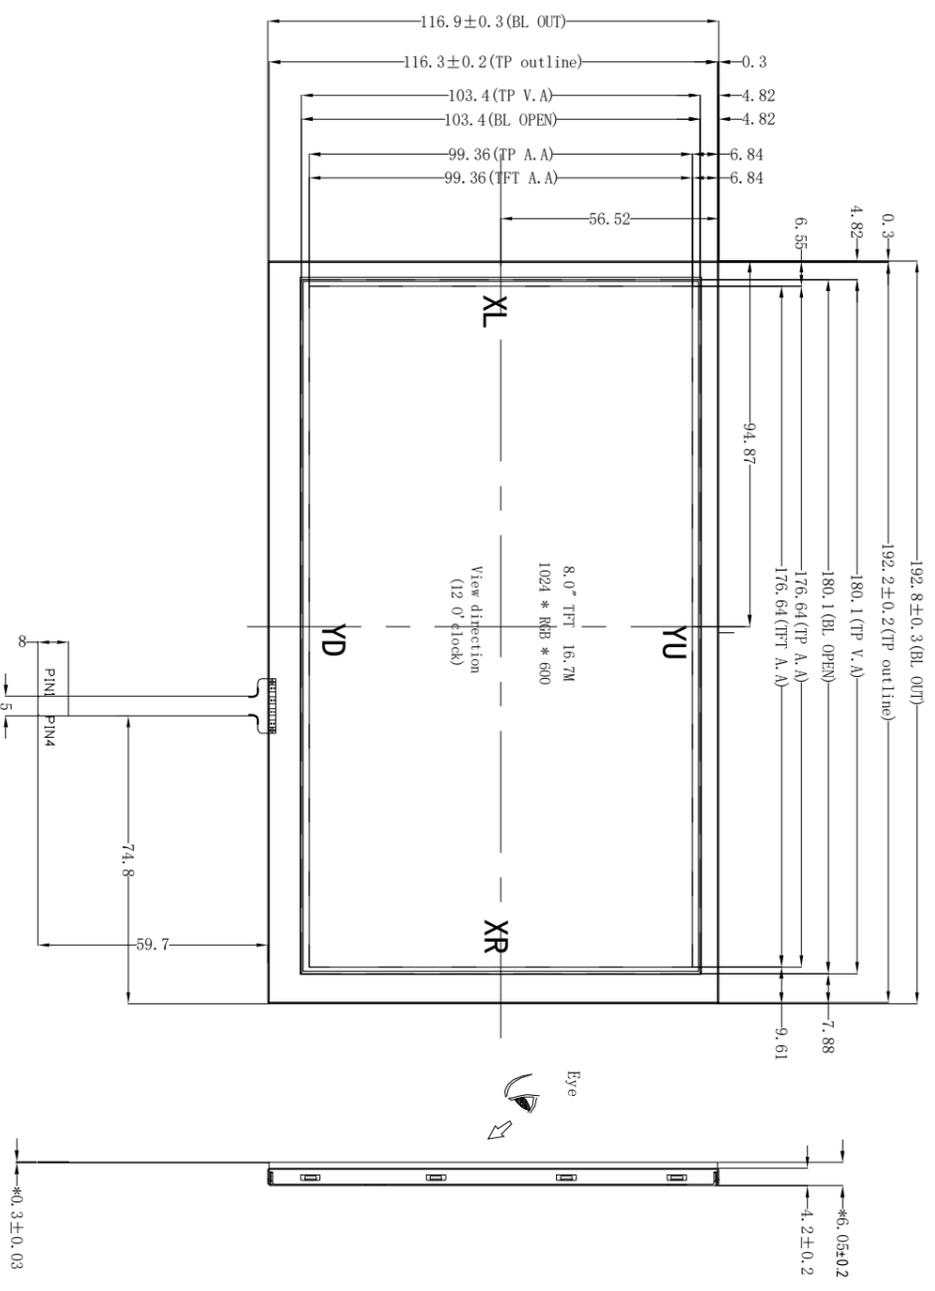

高亮 (High Luminance)

Detail A  
SCALE 5:1

NO.	SYMBOL
1	XL
2	YD
3	XR
4	YU

LCD Type	8.0" TFT, Transmissive, Normally white, TN
Resolution	1024(RGB) * 600
View Direction	12 O'CLOCK
Driver IC	HXX8282+HXX8689
Color Depth	16.7M
Interface Types	LVDS
Operating voltage	3.3V
TP/Lens	With RTP
Backlight LEDs	39 LEDs, 390mA, 9.3V
Surface luminance	850 cd/m <sup>2</sup>
Operating temperature	-20 °C ~ 70 °C
Storage Temperature	-30 °C ~ 80 °C
Storage Humidity	60% ~ 90% max

GENERAL TOLERANCE: ±0.2

" Need to pay attention to the key size with \*

版本 (Version)	变更记录 (Change History)	日期 (Date)	视角 (View):	比例 (Proportion):	设计 (DESIGN)	审核 (AUDITING)	批准 (APPROVED)
V1			M M	1 / 1	Aron	Penix	
V2					2017.11.29	2017.11.29	

东莞市一众显示科技有限公司  
DONG GUAN TEAM SOURCE DISPLAY TECH. CO, LTD.

产品型号 (Product Type): TST080HH002-01P