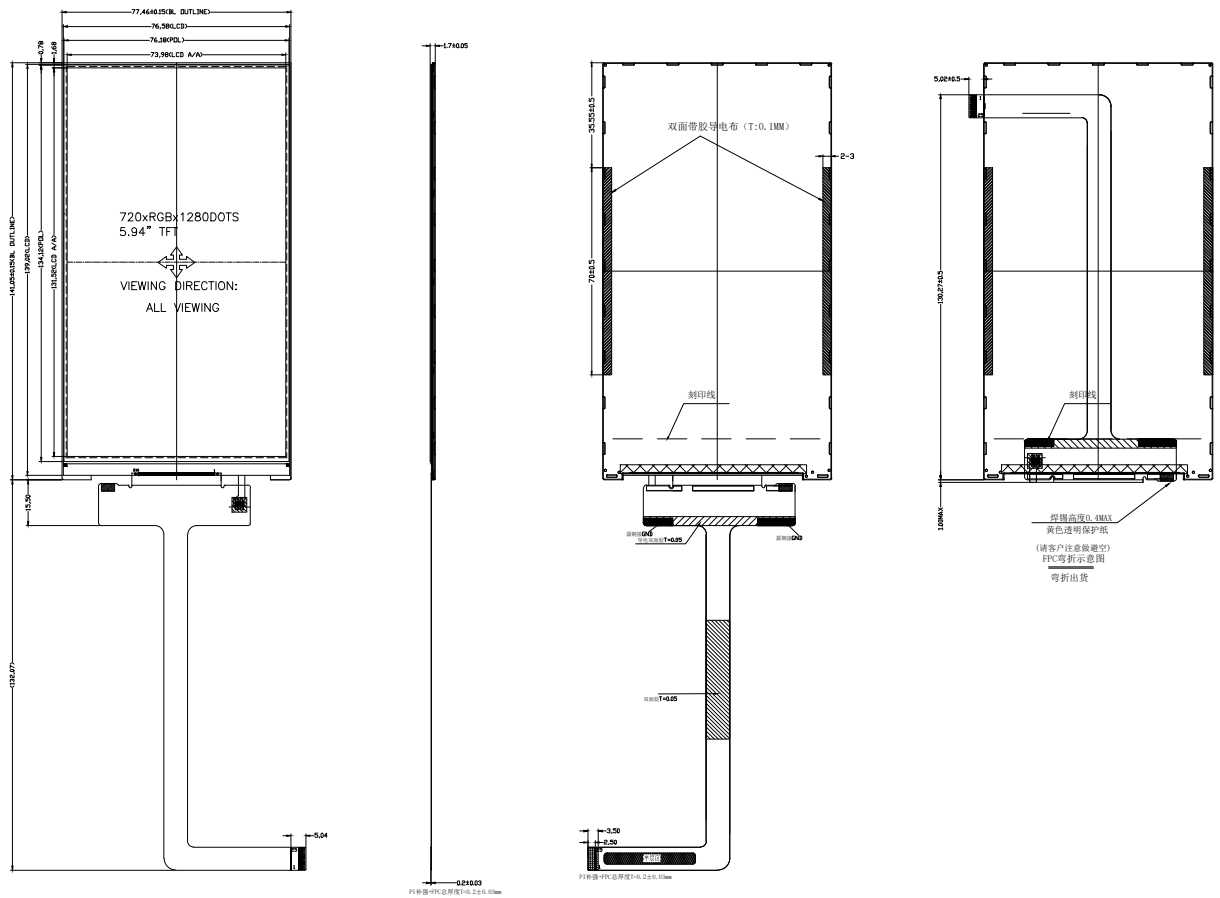

Pin	DESCRIPTION
1	AVDD(2.8V)
2	IOVDD(1.8V)
3	GND
4	D2P
5	D2N
6	GND
7	D1P
8	D1N
9	GND
10	CLKP
11	CLKN
12	GND
13	D0P
14	D0N
15	GND
16	D3P
17	D3N
18	GND
19	TE
20	NC
21	RST
22	NC
23	NC
24	LEDK
25	LEDA

LCD Type	6.0"TFT,Transmissive, Normally Black,IPS
Resolution	720(RGB)*1280
View Direction	ALL O'CLOCK
Driver IC	ILI9881D
Color Depth	16.7M
Interface Types	MIPI
Operating voltage	2.8V
TP/Lens	Without
Backlight LEDs	14 LEDs，30~40mA,21~22.4V
Surface luminance	300 cd/m^2(Typ)
Operating temperature	-20 ℃~70 ℃
Storage Temperature	-30 ℃~80 ℃
Storage Humidity	60℃ 90% max

" ☞ " Need to pay attention to the key size with *

版本(Version)	变更记录(Change History)	日期(Date)
V1		
V2		

东莞市一众显示科技有限公司
DONG GUAN TEAM SOURCE DISPLAY TECH. CO, LTD.

视 角 (View):		比例(Proportion):	1 : 1	设 计 (DESIGN)	审 核 (AUDITING)	批 准 (APPROVED)
单 位 (Unit):	M M	页 面 (Page):	1 / 1			
产品型号 (Product Type):	TST060HDHI-01			Jacky 2018.5.3	Aron 2018.5.3	
图纸版本 (Version):	V1					