

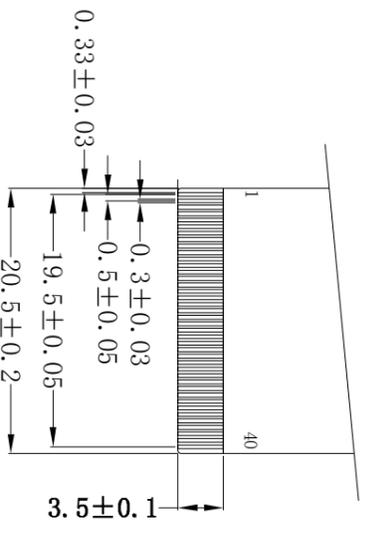


Reversion	Discription	Date	Signed

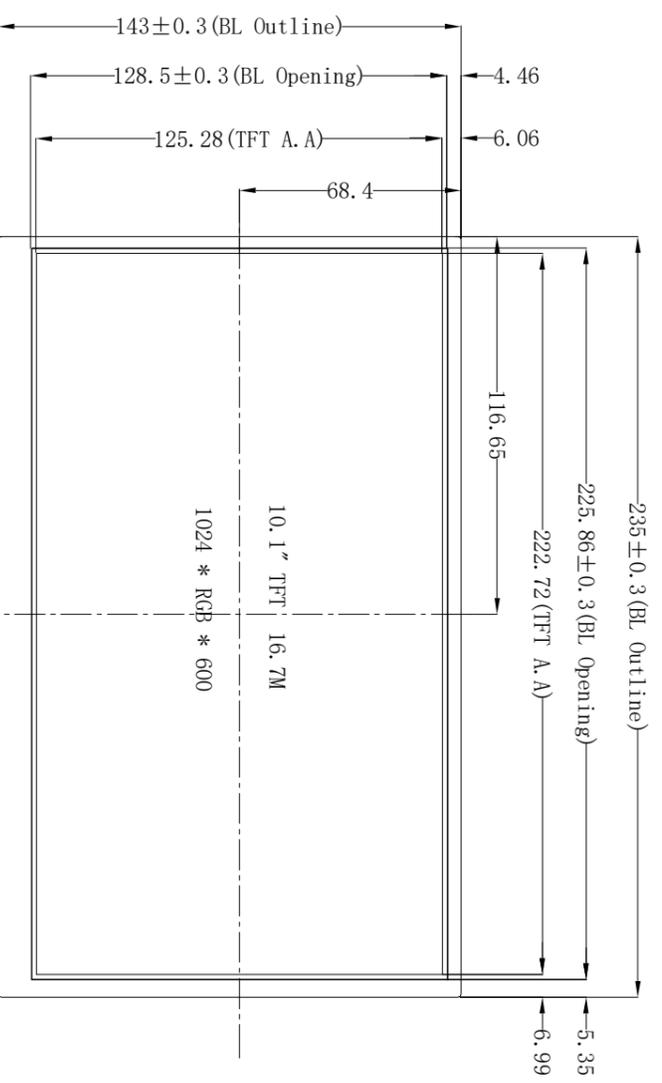

High Temp & High Humidity
Operation: To=60°C H=90%RH

Display Type:	10.1" TFT	LCD NO:	
BL LED or Color:	24-CHIP WHITE LED	IC NO:	
BL INPUT CURRENT:	240MA 9-10V	BL NO:	
Operating Voltage:	3.3V	TP NO:	无
Operation TEMP:	-20° C TO 70° C	上偏光片:	
Storage TEMP:	-30° C TO 80° C	下偏光片:	
COMPLIABLY:	RoHS	Surface luminance	600 cd/m2



PN:	SYMBL
1	VCOM
2	VDD
3	VDD
4	NC
5	Reset
6	STB/B
7	GND
8	RX1N0-
9	RX1N0+
10	GND
11	RX1N1-
12	RX1N1+
13	GND
14	RX1N2-
15	RX1N2+
16	GND
17	RX1K1N-
18	RX1K1N+
19	GND
20	RX1N3-
21	RX1N3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	SELB
29	AVDD
30	GND
31	LED-
32	LED-
33	L/R
34	U/D
35	VGL
36	CABCE/N1
37	CABCE/N0
38	VGH
39	LED+
40	LED+



东莞市一众显示科技有限公司
DONG GUAN TEAM SOURCE DISPLAY TECH. CO, LTD.

Customer Ref.	Model No.	Drawing Title		Characteristics	
---	TST101WSBH-06	---		---	
Part No.	Approve	Material	Unmarked Tolerance	Unit	Scale
---	Checked		±0.2	mm	1:1
Drawing No.	Draw	Date	2017.09.28	Rev	---
	Aron				

