



注：标注  请重点确认

| REV 版本 | DESCRIPTION 描述 | DATE 日期 |
|--------|----------------|---------|
| A00    | First issue    | 2017-07 |

| No. | Pad Name    |
|-----|-------------|
| 1   | LED_A       |
| 2   | LED_K       |
| 3   | IOVCC(1.8V) |
| 4   | NC          |
| 5   | GND         |
| 6   | RESET       |
| 7   | LPTE        |
| 8   | VCC(2.8V)   |
| 9   | VCC(2.8V)   |
| 10  | GND         |
| 11  | GND         |
| 12  | TDPO        |
| 13  | TDNO        |
| 14  | GND         |
| 15  | TDP2(NC)    |
| 16  | TDN2(NC)    |
| 17  | GND         |
| 18  | TDN1        |
| 19  | TDP1        |
| 20  | GND         |
| 21  | TCN         |
| 22  | TCP         |
| 23  | GND         |
| 24  | NC          |
| 25  | NC          |

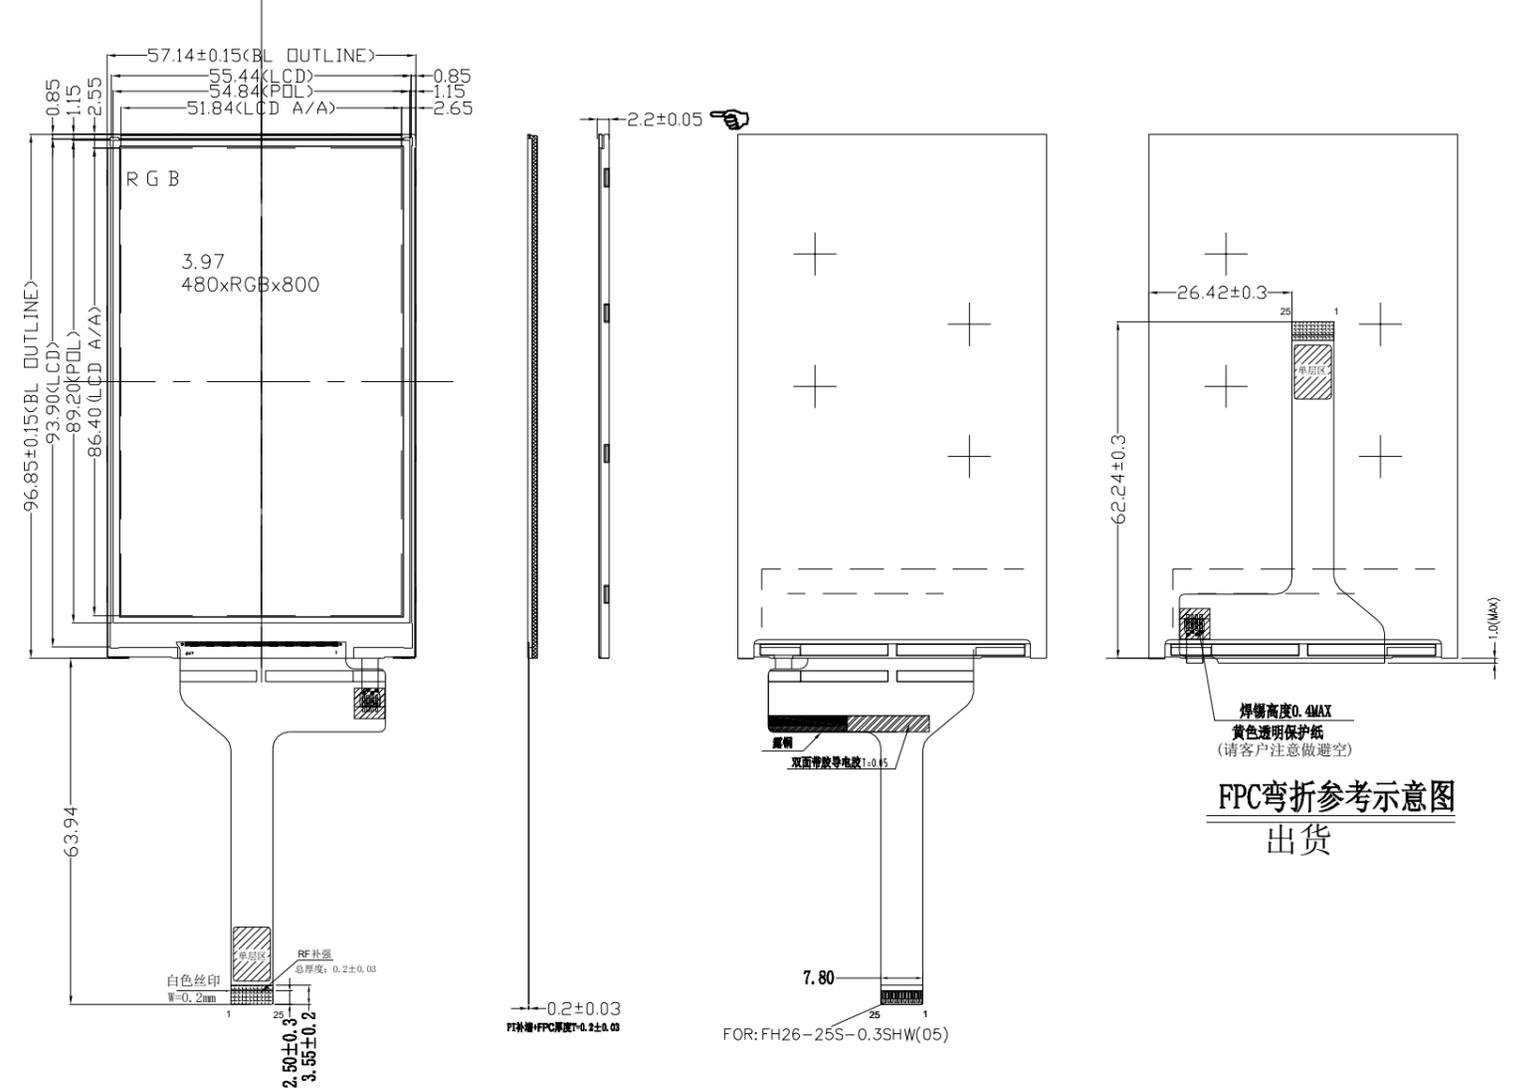


- NOTES:
1. DRIVE IC :ST7701S
  2. TYPE : TFT CTC3.97 TN
  3. DISPLAY MODE : Transmissive
  4. Viewing Angle : 12 O'CLOCK
  5. BACKLIGHT:8 CHIP-WHITE LED
  6. OPERATING TEMPERATURE: -20° C TO 70° C  
STORAGE TEMPERATURE: -30° C TO 80° C
  7. 产品满足ROHS要求
  8. GENERAL TOLERANCE : ±0.2
  9. 建议客户开窗尺寸比 POL单边小0.5mm, 防止露POL白边
  10. 客户做假纯屏手机的, LENS上的双面胶不要粘在TP上, 要避开TP.
  11. 客户机壳上的泡棉需进入玻璃单边0.3MM (MIN), 防止漏光.

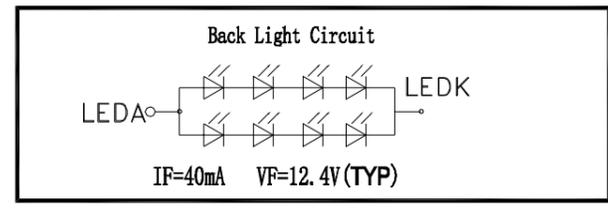

| 标记 | 修改内容 | 修改者 | 修改日期 | SCALE: FIT                |
|----|------|-----|------|---------------------------|
| ①  |      |     |      | SHEET: 1 OF 5             |
| ②  |      |     |      | GENERAL TOL: ±0.2 UNIT mm |
| ③  |      |     |      | APPROVALS DATE            |
| ④  |      |     |      | APP:                      |
| ⑤  |      |     |      | CHK:                      |
| ⑥  |      |     |      | DWN:                      |

东莞市一众显示科技有限公司  
DONG GUAN TEAM SOURCE DISPLAY TECH. CO, LTD.

MODEL NUMBER: TST3972532  
PROJECTION:   
PART NO: 工程图

DO NOT SCALE THIS DRAWING.