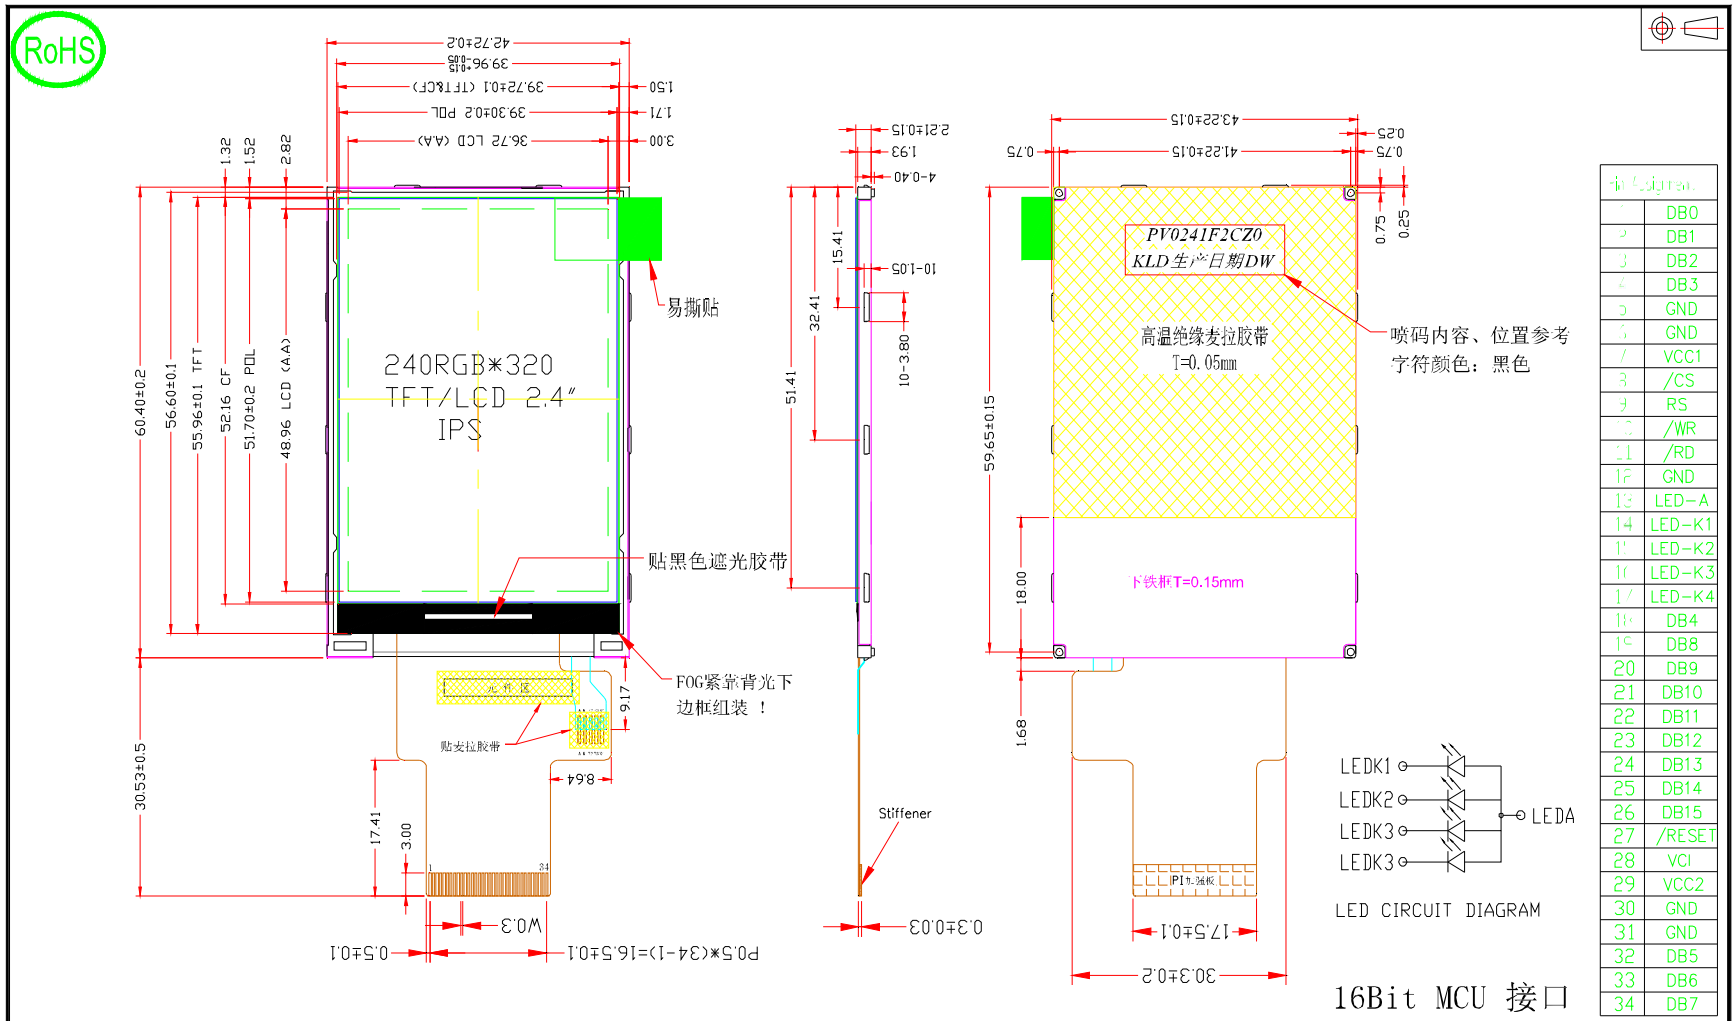

pin Assign.	
1	DB0
2	DB1
3	DB2
4	DB3
5	GND
6	GND
7	VCC1
8	/CS
9	RS
10	/WR
11	/RD
12	GND
13	LED-A
14	LED-K1
15	LED-K2
16	LED-K3
17	LED-K4
18	DB4
19	DB8
20	DB9
21	DB10
22	DB11
23	DB12
24	DB13
25	DB14
26	DB15
27	/RESET
28	VCI
29	VCC2
30	GND
31	GND
32	DB5
33	DB6
34	DB7

Display Type	TFT/Normally Black
Display Resolution	240RGB*320
Viewing Angle	ALL
LCD Controller/Driver	ILI9341V
Logic Voltage	3.3V
Operation Temperature	-10°C ~ 60°C
Storage Temperature	-20°C ~ 70°C
Backlight Spec.	White LED (4 dies in parallel I=60mA V=3.2V)

REV.	DESCRIPTION	DATE
1.0	新制订	2015.10.17

DRAWN:
CHECK:
APPROVE:

TSD™ 一众显示 TEAM SOURCE DISPLAY

TITLE:
DOC. NO.
PART NO.
SCALE 1:1
REV. 1.0
SHEET 1 OF 1
UNITS: mm